




CoreLine Waterproof Batten

CoreLine Waterproof LED is a direct replacement for traditional fluorescent waterproof luminaires, in terms of light performance, installation flexibility and length. With similar look and feel to traditional battens, this diffused luminaire will save up to 50% in energy, and will last 50,000 hours, hence reducing maintenance costs.



Features and Benefits

- Up to 50% lower energy consumption compared to TL-D
- Reliable LED technology – maintenance free
- Direct substitute to conventional waterproofs in light performance, installation flexibility & length
- Substitute available for 2X18W/1X36W/2X36W/1X58W/2X58W TL-D
- Sleek design to create traditional look and feel
- Wide-beam light distribution
- Diffuser with optical element ensures visual comfort
- Ceiling-mounted bracket and suspension hooks included; installation can be made vandal-proof by additional screw fixation of mounting brackets

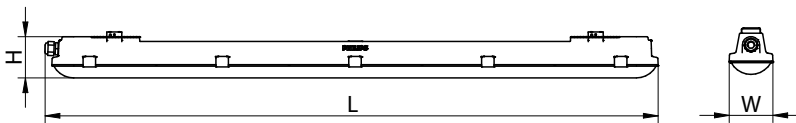

Model	W (mm)	H (mm)	L (mm)
2ft	87	82	661
4ft	87	82	1223
5ft	87	82	1504

Dimensions in mm (Nominal)



CoreLine Waterproof Batten continued

CORELINE WATERPROOF BATTEN			
Family Name	CoreLine Waterproof Batten	Installation	Surface Mounted, Suspension Hook
Model	WT120C - Standalone version	IP rating	IP65
Lumen/ Watt	6000lm/ 57W 4000lm/ 41W 3400lm/ 29W 2200lm/ 23W 1800lm/ 19W	IK Rating	IK08
CCT	4000K	Weight	1500mm - 1.82kg 1200mm - 1.53kg 600mm - 0.93kg
Colour Rendering Index (CRI)	80	Colour of housing	Light Grey
Flex and Plug	No	Application	Industry, F&B, Parking, Semi Outdoor, Under Canopy, Underground
*Lifetime (L70)	50,000hrs	Accessories (Included)	Mounting bracket (2pcs), suspension hook (2pcs), anti-vandal screws (2pcs), grommet (2pcs), cable gland (2pcs)
Unified Glare Ratio (UGR)	UGR23	Suspension Height - min/max	NA
Optics	Symmetrical wide beam	Maximum Run Length	NA
Driver		* = When the fitting reaches 70% of full potential (new)	
Dimmable	PSU (Fixed)		

COMMERCIAL CODE	I2NC	DESCRIPTION
WT120CI9W4K600	910500453335	WT120C LED18S/840 PSU L600
WT120C23W4K1200	910500453336	WT120C LED22S/840 PSU LI200
WT120C29W4K1500	910500453337	WT120C LED34S/840 PSU LI500
WT120C41W4K1200	910500453338	WT120C LED40S/840 PSU LI200
WT120C57W4K1500	910500453339	WT120C LED60S/840 PSU LI500