



## GreenPerform Waterproof Batten







GreenPerform LED Waterproof is a high quality luminaire with a high system efficacy that delivers significant energy savings of up to 50% as compared to conventional T8 batten. With a reliable and robust housing structure, this maximizes the endurance and contributes to its long lifetime.

It is suitable to be used in both direct and indirect lighting applications. This is due to its flexible optics and choice of symmetric or asymmetric mounting accessories that allows for a variety of different lighting applications.



### Features and Benefits

- Up to 95lm/W system efficacy, save over 50% energy by replacing T8 waterproof luminaires
- 50,000hr lifetime & IP65 & IK08 protection ensure ultimate reliability and endurance
- Comfortable light with high colour uniformity SDCM<3.5 , CRI>80
- Compact design & IP68 waterproof quick connector ease the installation

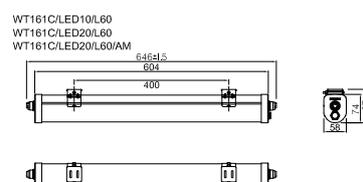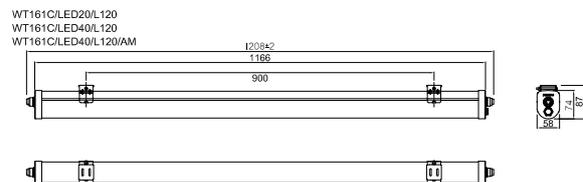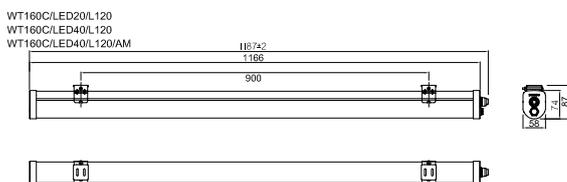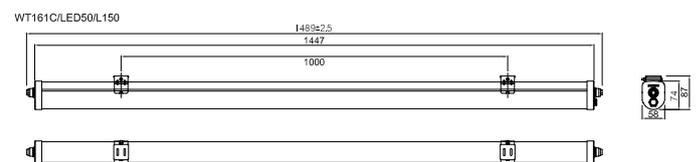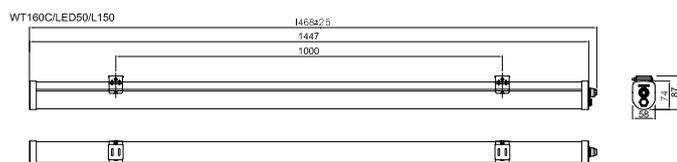



# GreenPerform Waterproof Batten continued

GREENPERFORM WATERPROOF BATTEN			
Family Name	GreenPerform Waterproof Batten	Driver	Philips Xitanium Driver
Model	WT160C - Standalone version WT161C - Trunkable version	Dimmable	PSU (Fixed)
Lumen/ Watt	4800lm/ 55W 3800lm/ 40W 1900lm/ 20W 1000lm/ 12W	Installation	Surface Mounted
CCT	4000K, 6500K	IP rating	IP65
Colour Rendering Index (CRI)	80	Weight	1500mm - 1.7kg 1200mm - 1.3kg 600mm - 0.7kg
Flex and Plug	No	Colour of housing	Green
Lifetime L70*	50,000hrs	Application	Industry, F&B, Parking, Semi Outdoor, Under Canopy, Underground
Unified Glare Ratio (UGR)	n/a	Accessories	Trunking Connector Cable (300mm)
Optics	Symmetrical wide beam (120°)	Suspension Height - min/max	NA
		Maximum Run Length	25 pcs trunking

\* = When the fitting reaches 70% of full potential (new)

COMMERCIAL CODE	I2NC	DESCRIPTION
WT160C10W4K600	911401511811	WT160C LED10 NW L600
WT160C10W6K600	911401511911	WT160C LED10 CW L600
WT161C10W4K600	911401512011	WT161C LED10 NW L600
WT161C10W6K600	911401512111	WT161C LED10 CW L600
WT160C20W4K600	911401512211	WT160C LED20 NW L600
WT160C20W6K600	911401512311	WT160C LED20 CW L600
WT161C20W4K600	911401512411	WT161C LED20 NW L600
WT161C20W6K600	911401512511	WT161C LED20 CW L600
WT160C20W4K1200	911401512611	WT160C LED20 NW L1200
WT161C20W4K1200	911401512711	WT161C LED20 NW L1200
WT160C20W6K1200	911401512811	WT160C LED20 CW L1200
WT161C20W6K1200	911401512911	WT161C LED20 CW L1200
WT160C40W4K1200	911401513011	WT160C LED40 NW L1200
WT160C40W6K1200	911401513111	WT160C LED40 CW L1200
WT161C40W4K1200	911401513211	WT161C LED40 NW L1200
WT161C40W6K1200	911401513311	WT161C LED40 CW L1200
WT160C50W4K1500	911401513411	WT160C LED50 NW L1500
WT160C50W6K1500	911401513511	WT160C LED50 CW L1500
WT161C50W4K1500	911401513611	WT161C LED50 NW L1500
WT161C50W6K1500	911401513711	WT161C LED50 CW L1500
WT161ZTB	911401527511	WT161Z TB